


Ponorné kladivo PMK500 VS



SPECIFIKACE KLADIVA		SPOTŘEBA VZDUCHU			
		PSI	BAR	CFM	m ³ /min
VÁHA	63 kg	150	10,3	310	8,8
DÉLKA	970 mm	200	13,8	421	11,8
VNĚJŠÍ PRUMĚR	118 mm	250	17,2	530	15
MAX. PRAC.TLAK	24 barů	300	20,7	655	18,5
ZÁVIT API REG	3" 1/2	350	24	780	22

DŘÍK DLÁTA - SANDVIK MISSION SD5

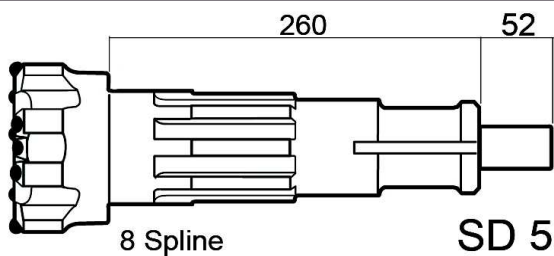

Dláto 130- 152 mm 8 drážek

Poz.	popis	ND číslo
1	kroužek	OC-01-05
2	těsnění	OC-02-05
3	O-kroužek	OC-03-05
4	ventil	OC-04-05
5	pružina ve.	OC-05-05
6	hor. unašeč	OC-06-05
7	rozvaděč	OC-07-05
8	O-kroužek	OC-08-05
9	O-kroužek	OC-09-05
10	píst	OC-10-05
11	válec	OC-11-05
12	krouž. aret.	OC-12-05
13	aretace dř.	OC-13-05
14	dol. unašeč	OC-14-05

